Microwaves & RF 2003 Editorial Index

COMMERCIAL

▲ Top products of 2002 (January, p. 102)

COMMUNICATIONS

▲ UWB proponents seek standardization (August, p. 33)
▲Reviewing SDARS antenna requirements (September, p. 51)
▲ Understanding ultra narrowband modulation (December, p. 53)

COMPONENTS

▲ Achieving antenna isolation within wireless systems (January, p. 74)
▲ Oscillators: an old look at a new model (January, p. 85)
▲ Design a high-precision antenna for GPS (January, p. 91)
▲ Tiny quad hybrid spans 2 to 18 GHz (January, p. 108)
▲ LO buffers/splitters ease LO drive designs (February, p. 89)
▲ 300-MHz dual-mac DSPs break the cost barrier (February, p. 118)
▲ DSPs and data converters enable complex modulation (March, p. 33)
▲ Comparing high-frequency control devices (March, p. 53)
▲ Sampling IF filters fortify Bluetooth designs (March, p. 72)
▲ MMIC mixers reach high intercept points (March, p. 94)
▲ Coaxial connector is Type N alternative (March, p. 100)
▲ Combiners/dividers range 0.8 to 3.0 GHz (March, p. 102)
▲ Linearizer hikes PA efficiency (April, p. 33)
▲ Veteran cap supplier unleashes new TCXOs (April, p. 92)
▲ 4 x 8 matrix serves smart antennas (April, p. 102)
▲ Filtering interference from cellular receivers (May, p. 88)
▲ Analyze coax cable digital pulse distortion (May, p. 96)
▲ Smart clocks set timing standards (May, p. 124)
▲ Blind-mate connectors bridge DC to 40 GHz (May, p. 130)
▲ Designing antennas for UWB systems (June, p. 53)
▲ LTCC leads to tiny 90-deg. splitter (June Cover, p. 90)
▲ Single HBT amp drives all WLAN bands (June, p. 100)
▲ Linearizers enhance PA performance (June, p. 106)
▲ ADC driver offers digitally controlled gain (June, p. 108)
▲ Linear power control of GSM amplifier power (July, p. 51)
▲ Convert distributed MICs to MMICs (July, p. 62)

Microwaves & RF 2003 Editorial Index

COMMERCIAL

▲ Top products of 2002 (January, p. 102)

COMMUNICATIONS

▲ UWB proponents seek standardization (August, p. 33)
▲Reviewing SDARS antenna requirements (September, p. 51)
▲ Understanding ultra narrowband modulation (December, p. 53)

COMPONENTS

▲ Achieving antenna isolation within wireless systems (January, p. 74)
▲ Oscillators: an old look at a new model (January, p. 85)
▲ Design a high-precision antenna for GPS (January, p. 91)
▲ Tiny quad hybrid spans 2 to 18 GHz (January, p. 108)
▲ LO buffers/splitters ease LO drive designs (February, p. 89)
▲ 300-MHz dual-mac DSPs break the cost barrier (February, p. 118)
▲ DSPs and data converters enable complex modulation (March, p. 33)
▲ Comparing high-frequency control devices (March, p. 53)
▲ Sampling IF filters fortify Bluetooth designs (March, p. 72)
▲ MMIC mixers reach high intercept points (March, p. 94)
▲ Coaxial connector is Type N alternative (March, p. 100)
▲ Combiners/dividers range 0.8 to 3.0 GHz (March, p. 102)
▲ Linearizer hikes PA efficiency (April, p. 33)
▲ Veteran cap supplier unleashes new TCXOs (April, p. 92)
▲ 4 x 8 matrix serves smart antennas (April, p. 102)
▲ Filtering interference from cellular receivers (May, p. 88)
▲ Analyze coax cable digital pulse distortion (May, p. 96)
▲ Smart clocks set timing standards (May, p. 124)
▲ Blind-mate connectors bridge DC to 40 GHz (May, p. 130)
▲ Designing antennas for UWB systems (June, p. 53)
▲ LTCC leads to tiny 90-deg. splitter (June Cover, p. 90)
▲ Single HBT amp drives all WLAN bands (June, p. 100)
▲ Linearizers enhance PA performance (June, p. 106)
▲ ADC driver offers digitally controlled gain (June, p. 108)
▲ Linear power control of GSM amplifier power (July, p. 51)
▲ Convert distributed MICs to MMICs (July, p. 62)

▲ Management makeover marked by new packages (July, p. 88)
▲ Spatial combining leads to MM-wave power (July, p. 94)
▲ MEMS SPDT switch runs with +3 VDC (July, p. 96)
▲ MEMS sources offer alternative to quartz (August Cover, p. 84)
▲ Multiloop synthesizer tunes 1 to 2 GHz (August, p. 92)
▲ Assemble a tunable L-band preselector (September, p. 80)
▲ Enhance the design of LTCC RF modules (September, p. 90)
▲ Ceramic resonator oscillators challenge SAW performance (September Cover, p. 100)
▲ Low-noise synthesizers switch in microseconds (September, p. 116)
▲ Active mixers deliver high IP3 (October, p. 66)
▲ Circulators/isolators serve UMTS applications (October, p. 92)
▲ Design inset-fed microstrip patch antennas (December, p. 64)
▲ Design short high Q resonators (December, p. 75)

COMPUTER-AIDED ENGINEERING

▲ Simulators model system behavior (February, p. 33)
▲ Electromagnetic analysis speeds RFID design (February, p. 55)
▲ Software shaves time off filter synthesis (February, p. 64)
▲ Model MMIC nichrome resistors (February, p. 76)
▲ EDA software suite expands MMIC tools (February, p. 116)
▲ Meld load-pull tests with EDA tools (April, p. 51)
▲ Optimize benefits of subharmonic mixers (June, p. 76)
▲ EM software boosts productivity (June, p. 96)
▲ Simulation approach aids RF design debugging (August, p. 70)
▲ Free software is powerful simulator (August, p. 96)
▲ Software sculpts complex wave-

WE COULD TRY TO MAKE OUR ATTENUATORS LOOK MORE EXCITING.

(But their dependability is excitement enough.)

Maybe our competitors should try making their products look fabulous in fuchsia because they'll never match Narda's quality. For over 40 years, we've delivered products with such unmatched unit-to-unit repeatability that quality has become a Narda trademark. Just look at our variable and fixed attenuators. They offer an almost limitless combination of dependable physical and electrical performance characteristics. Ask about our custom capabilities, too. Call today at 631-231-1700. You'll be pleased with our competitive prices. Delighted with the fast delivery. And thrilled with Narda's quality. Now, with excitement like that, who needs a flashy paint job?

narda
microwave-east
an L3 communications company

Microwaves & RF 2003 Editorial Index

forms (September, p. 110)
▲ Simple PBG structures serve microwave designs (November, p. 51)
▲ RF design environment closes verification gap (November Cover, p. 86)

CONFERENCES

▲ Wireless show spotlights wireless networking (January, p. 33)
▲ ARMMS tackles measurement issues (January, p. 36)
▲ European event offers snapshot of RF technology (February, p. 38)
▲ Show summarizes microwave technology (May, p. 33)
▲ Show tracks changing military requirements (September, p. 33)
▲ Annual IEDM heralds device developments
▲ Wireless symposium moves to San Diego (December, p. 33)

CROSSTALK

▲ Crosstalk: An interview with Sirenza's Robert Van Buskirk and Chuck Bland (June, p. 33)

DEFENSE ELECTRONICS

▲ Compact DDS silences spurious and phase noise (April, p. 94)
▲ Sizing up the Smiths Interconnect Group (September Supplement, p. 18)
▲ Evaluating RF relays for military systems (September Supplement, p. 23)
▲ Software adds dynamic requirements management (September Supplement, p. 32)

DEVICES & ICs

▲ Chip set adds embedded GPS (February Cover, p. 112)
▲ Wireless approach monitors tire pressure (March, p. 62)
▲ Flexible chip set arms 802.11a/b/g WLANs (May Cover, p. 108)
▲ Tracking advances in solid-state power (July, p. 33)
▲ Gaining LDMOS device linearity and stability (September, p. 65)
▲ Low-cost transceiver drives wireless USB (September, p. 108)
▲ SiGe direct modulators ease upconverter design (October Cover, p. 78)
▲ Third-generation ICs speed Bluetooth integration (October, p. 96)
▲ New supplier debuts innovative WLAN chips (October, p. 100)
▲ Linearizing MPMs for communications (November, p. 58)
▲ SiGe fires single-chip fractional N-synthesizer (December Cover, p. 88)
▲ Read/write RFID chips boast large memory (December, p. 92)
▲ HBT amplifier gains from InGaP technology (December, p. 100)

FIBER OPTICS

▲ Low-cost driver powers OC-192 modulators to 12.5 Gb/s (November, p. 100)

MATERIALS

▲ Improve PCB shielding for portable devices (May, p. 72)
▲ Mounting technique aids MMIC performance (August, p. 60)
▲ Engineered substrates yield high stability (October, p. 98)
▲ Novel materials form tunable components (November, p. 106)

SERVICES

▲ CD-ROM course teaches filter design (November, p. 108)

SYSTEMS & SUBSYSTEMS

▲ System tests radar pulse stability (May, p. 120)
▲ Tracking WCDMA transmitter theory (June, p. 62)
▲ Frequency synthesizers yield stable signals (October, p. 33)
▲ Smart synthesizers simplify RF integration (October, p. 55)
▲ High-speed synthesizer spans 2.25 to 18 GHz (December, p. 94)

TEST & MEASUREMENT

▲ Performing Bluetooth RF radio testing (January, p. 53)
▲ Check Bluetooth baseband signals with a scope (January, p. 67)
▲ Coaxial tuners control impedances to 65 GHz (January Cover, p. 97)
▲ System automates GSM/WCDMA location-capable mobile testing (January, p. 111)
▲ Delay-by-events trigger aids pulsed signal analysis (January, p. 114)
▲ Generate wide-dynamic-range WCDMA/3GPP signals (February, p. 101)
▲ Handheld analyzers check

Microwaves & RF 2003 Editorial Index

Naval systems (March Cover, p. 88)
▲ Reducing ESR measurement errors (April, p. 75)
▲ On-wafer probes test silicon ICs to 110 GHz (April Cover, p. 84)
▲ Making accurate burst measurements (May, p. 57)
▲ EMC antenna spans 26 MHz to 5 GHz (June, p. 102)
▲ Test spectrum analyzer ACP dynamic range (July, p. 70)
▲ Instrument checks GPS noise immunity (July Cover, p. 84)
▲ Agile synthesizers add list-mode tuning (July, p. 90)
▲ Configure an optimal RF/microwave switch system (August, p. 51)
▲ Testers mimic propagation losses to 13.25 GHz (August, p. 88)
▲ Testers mimic propagation losses to 13.25 GHz (September, p. 108)
▲ Analyzer captures broadband signals (September, p. 118)
▲ Carrier-to-noise generators enhance BER testing (October, p. 86)
▲ Make accurate pulsed S-parameter measurements (November, p. 72)
▲ Cables extend test range to 65 GHz (December, p. 104)
▲ Meter aids compliance at co-located sites (December, p. 106)

PDD

Your Online Resource

For RF and Microwave Products and Manufacturers

If you need a part, you'll find it at

www.m-rf.com

WE COULD TRY TO MAKE OUR CONTROL PRODUCTS LOOK MORE EXCITING.

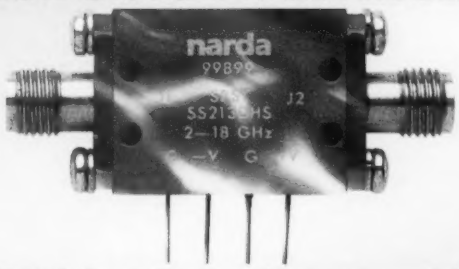

(But their quality is excitement enough.)

We'll leave the glitzy, day-glo product colors to those who lack the substance of Narda. For over 40 years, we've delivered products with such unmatched unit-to-unit repeatability that quality has become a Narda trademark. Just look at our control products. They feature high performance designs with high power ratings and low insertion loss. Ask about our custom capabilities, too. Call today at 631-231-1700. You'll be pleased with our competitive prices. Delighted with the fast delivery. And thrilled with Narda's quality. Now, with excitement like that, who needs to be dazzled by the paint job?

narda microwave-east
an L3 communications company